




LCD Access Controller

AR-837-EF3D0



- Built-in Door Bell button
- Optional for Built-in Voice module
- Weatherproof Design for outdoor use
- Optional for Built-in HID module
- Illuminated Keypad Design
- Multiple Access Modes: FP / RF Tag / PIN Code
- Capacity to connect with fire call points to release all doors under emergency


■ Diagram of double door control

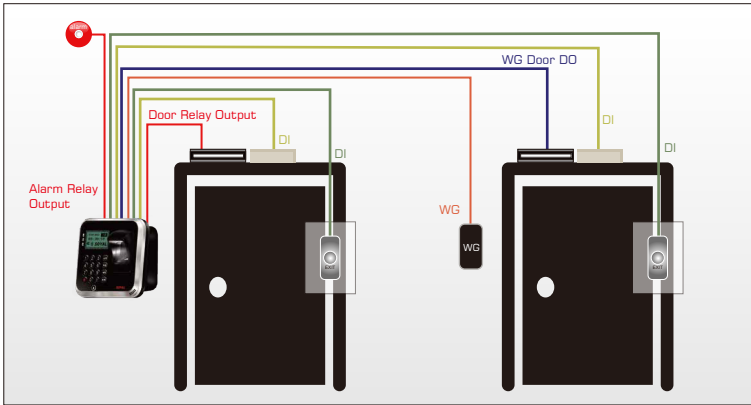

■ Specification

Frequency	125KHz	13.56MHz	Dual Band
Standard	EM Standard (Option) HID Prox Indala Prox	ISO14443A (Option) ISO7816 DESFire FeliCa™ NFC	EM Standard ISO14443A (Option) HID Prox Indala Prox DESFire FeliCa™ NFC
Reading Range (Depends on Tags)	5-15cm	2-5cm	125kHz : 5-15cm 13.56MHz : 2-5cm
Power Supply	9-24VDC		
Power consumption	<5W		
Communication Interface	RS-485 / Ethernet (Optional)		
Baud Rate	9600 bps(N,8,1) or 10/100M Base T		
Temperature	-20 °C to +60 °C		
Digital Input	Egress(R.T.E.) x 2 / Door contact x 2		
Relay Output	Alarm Relay / Lock Relay		
Lock Relay Time	ON/OFF, 0.1-600 Sec.		
Alarm Time	Toggle, 1-600 Sec.		
Tamper Switch	Limit Switch (Form C)		
User Capacity	16,000		
Event log	32,000		
External Reader	1 Wiegand Port		
Anti-pass-back	Yes		
Lift Control	64 Floors, 16,000 Users		
Serial port	Yes		
Transistor Output	Arming LED / Alarm / Duress / WG Lock Relay / Security trigger signal		
LCD Panel	128*64 (4-Line messages, 16 Characters each line)		
Indicator	6 LED & 1 Beeper		
Keypad Material	Illuminated Rubber		
Time Zone	63		
Operation Mode	Stand-Alone / Networking		
Door Bell Button	Yes		
By Order Module	AR-MDL-721V (Voice Module); AR-837i (TCP/IP) AR-WG-HID (HID RF Module)		
Fingerprint Type	Optical Sensor		
ERR	<0.1%		
Fingerprint User	500 (1-3 finger for each user)		
Auth. Speed (1:1000)	0.79Sec.		
Dimensions (mm)	133(L)X147(W)X65/30(H)		
Weight (g)	470±30		
Sensible Temperature	+38~39 °C		

■ Structure

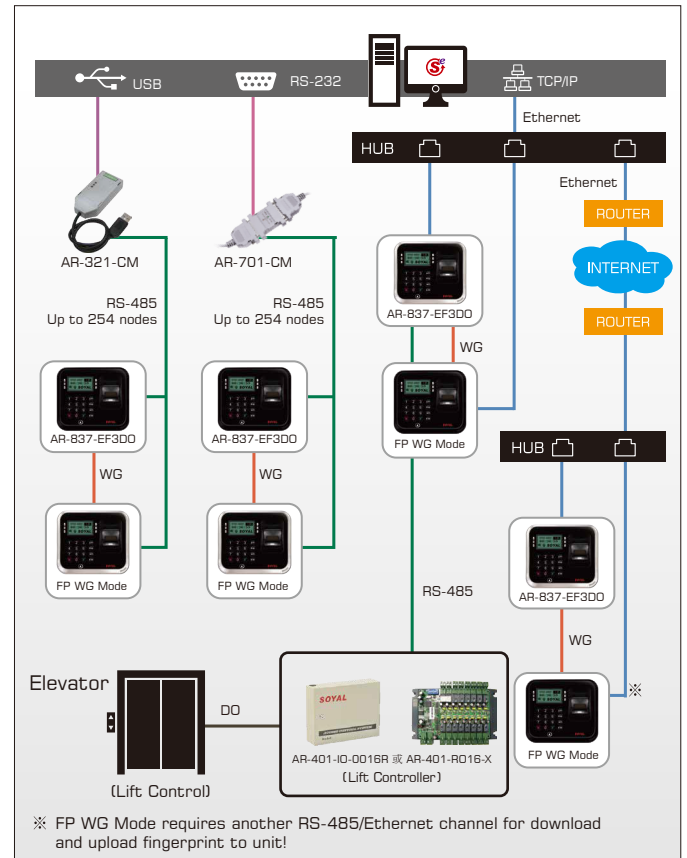

■ Dimensions (mm)

